



Voice and Data Coverage at Their Best



Base Station Antennas, Tower Mounted Amplifiers, and
Crossband Couplers for LTE Deployments in 700 MHz





COMMSCOPE®

Connect + Evolve

CommScope is a premier global supplier of RF footprint solutions for the wireless industry, known for our commitment to customers beyond the product sale. We provide a one-stop source for managing the entire lifecycle of a wireless network – from design through manufacturing and delivery – and offer complete solutions for wireless infrastructure, including top-of-the-tower base station antennas, cable systems and cabinets, RF site solutions, signal distribution, and network optimization.

CommScope is celebrated as a worldwide leader in “last mile” solutions. Combining innovative technologies, premier brands, and over 70 years of experience, we continue to expand our global service model and create an enhanced offering of communications infrastructure solutions that addresses a broader spectrum of customer needs.

After-sale support includes warranties, a full spectrum of program management and deployment services, and value-added support featuring certified training, system planning software, rapid access to technical specialists on a 24/7 basis, and an online resource library.

Why CommScope for LTE Deployment in 700 MHz?

Today, CommScope is recognized worldwide for our complete end-to-end solutions. Renowned for our technically advanced Andrew Solutions Base Station Antenna Systems, Tower Mounted Amplifiers (TMA), and Crossband Couplers (CBC), CommScope incorporates the multiple value-added features that have made us the preferred products of system managers, designers, and engineers around the globe.

- Designed with proven 850 MHz technology.
- Facilities located globally for easy deployment.
- Seamless integration into existing networks.
- Significant capability to design new products and quickly ramp up into full-scale production volume.
- Low profile design for easy zoning approvals.

Quality Assurance


Trust CommScope for consistent and reliable base station antenna products:

- 100% of our production antennas are tested in an anechoic environment for VSWR.
- 100% of our production antennas are tested in an anechoic chamber for Passive Intermodulation (PIM), during which each unit is subjected to a dynamic shock.
- 100% of our dual-polarized antennas are tested for isolation.

LNX-6515DS-VTM
DualPol® Single Band
Base Station Antenna



DB810KE-A
Omni-Directional
Base Station Antenna

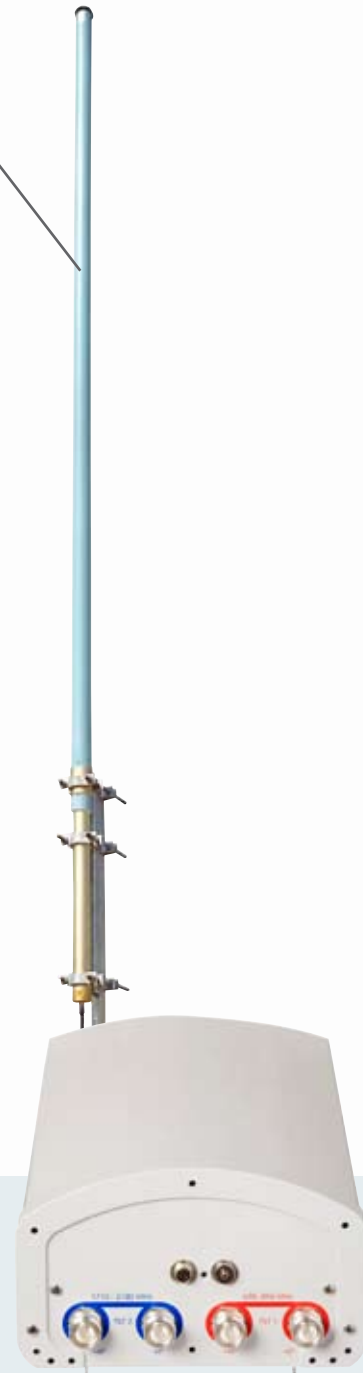

DBXNH-6565A-VTM
DualPol® Dual Band
Base Station Antenna

SBNH-1D8585A
SmartBeam® Dual Band
Base Station Antenna


CommScope Understands the 700 MHz Challenges

Application Issues to Consider


- Lower bandwidth will drive the size of the antennas.
- Applications will drive the priority for product development:
 - Capacity for urban deployments – 65° Horizontal Beamwidth (HBW).
 - Coverage for outlying areas – 85° HBW.
 - Long Term Evolution (LTE) considerations.
 - 2x2 or 4x4 Multiple Input Multiple Output (MIMO) application passive intermediate suppression.
- Passive Intermodulation (PIM) may be a significant consideration.
- Deployment and construction.
- Risk minimization to the existing network performance during this rollout:
 - Match existing networks' RF footprint.


Andrew Base Station Antenna Portfolio

CommScope's portfolio of Andrew base station antennas and core technical competencies provide our customers with a full suite of antenna solutions worldwide.

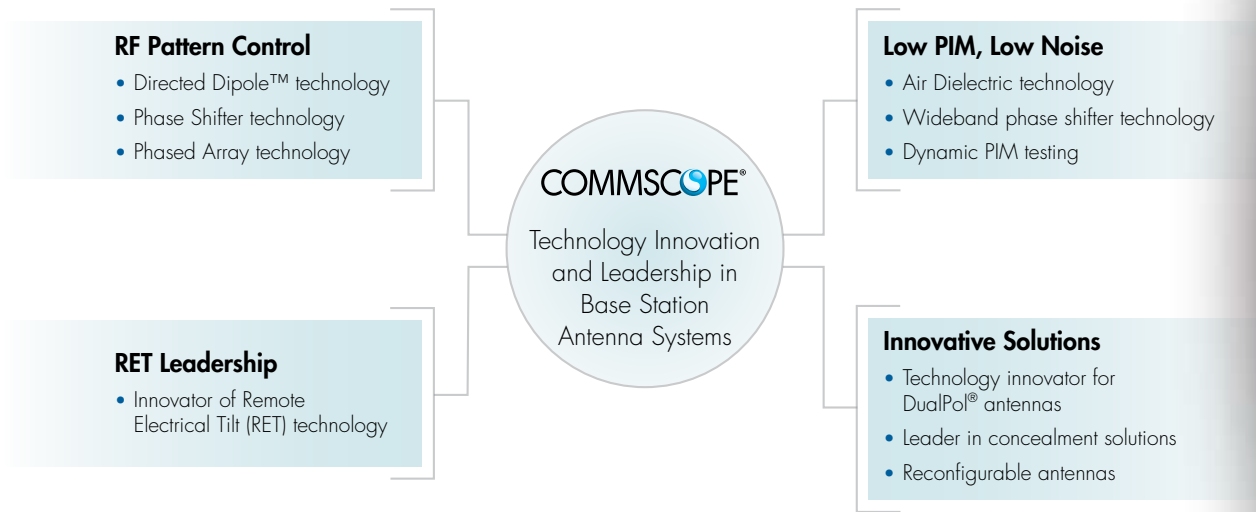


Proven Experience In Every Major Global Network Build-Out

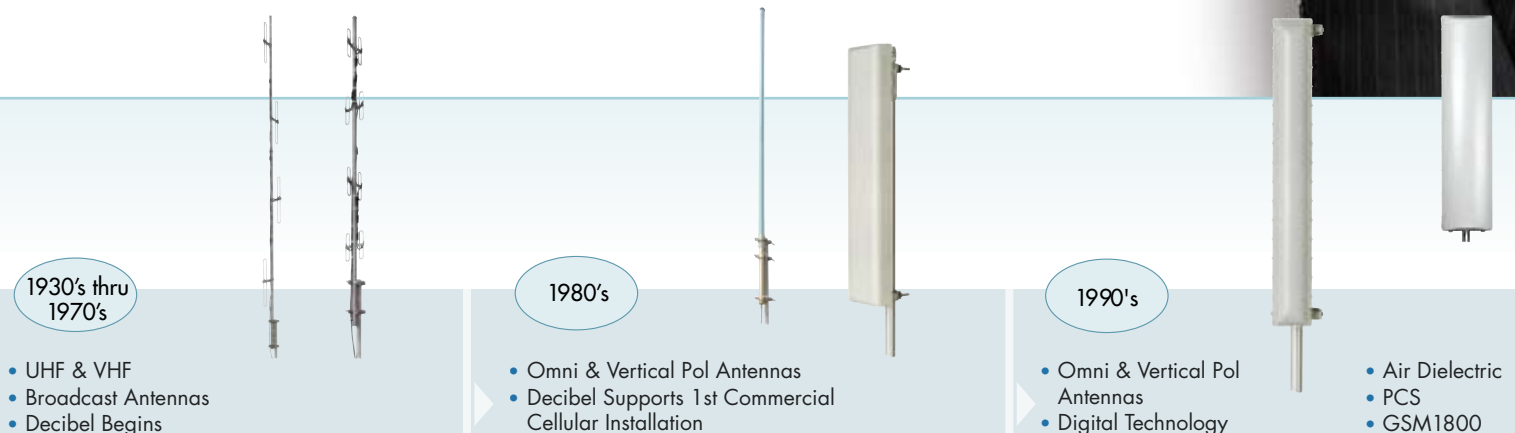


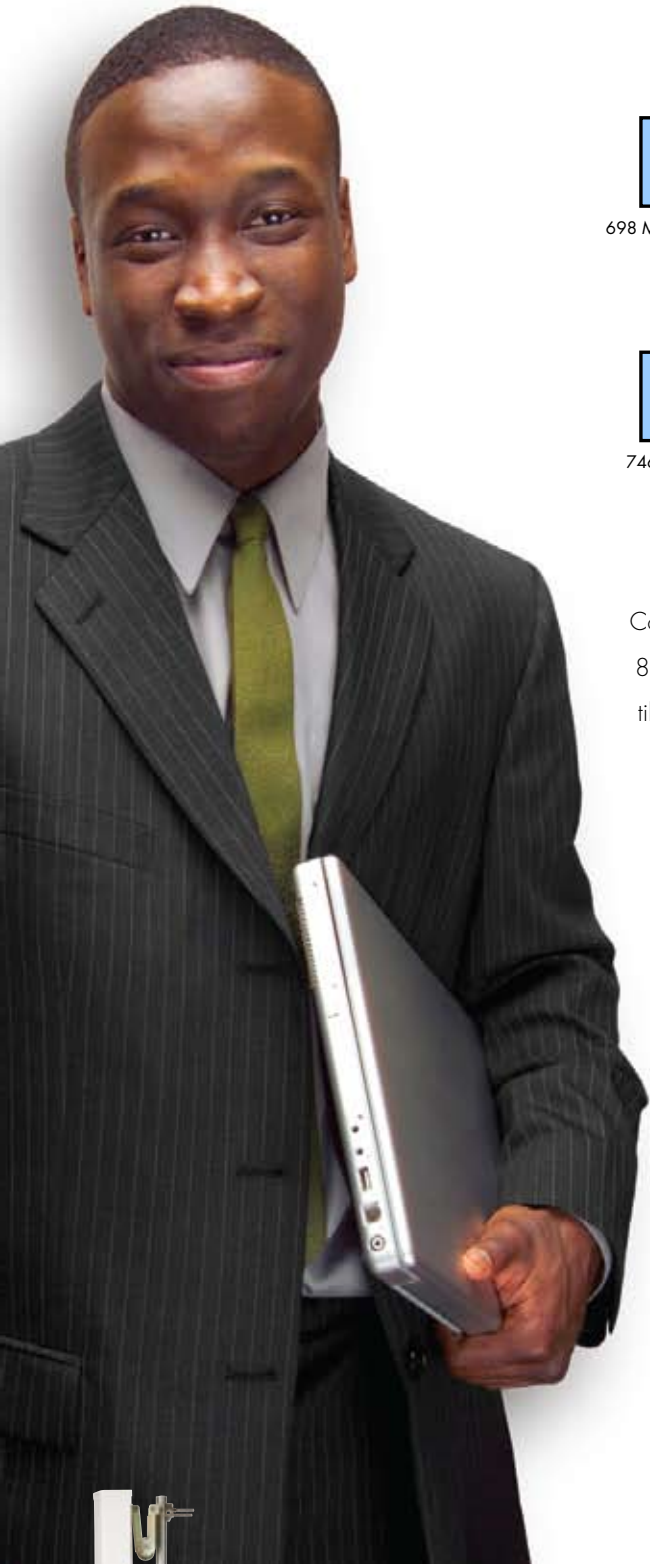

Lower 700 Band (698 – 746 MHz)

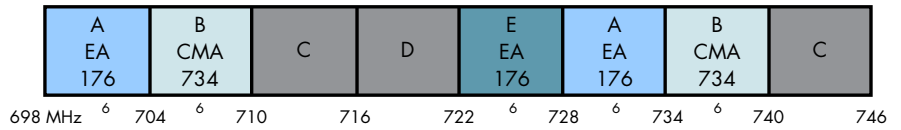

Upper 700 Band (746 – 806 MHz)

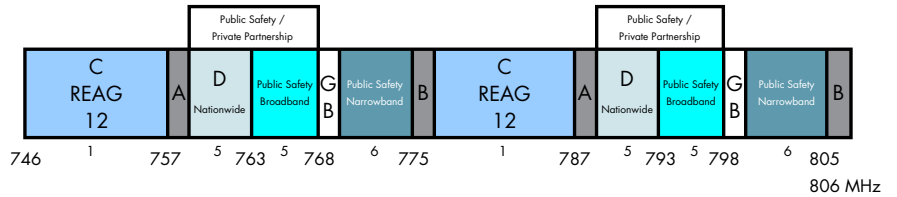

700 MHz Differentiating Factors

CommScope has set the standard with best-in-class PIM results, integrated proven 850 MHz technology into our designs, superior RF pattern performance, and electrical tilt management capability.

- Wideband 698–896 MHz antennas are capable of serving either lower or upper 700 MHz, as well as 850 MHz Cellular application.
- Designed using existing 806–960 MHz air dielectric technology, providing low loss with best-in-class PIM results, which has scaled easily to the new frequency band. Nearly one million antennas with this construction in use today!
 - DualPol® models available for both single band and dual band applications.
 - Our 65° dual band models are constructed with patented MART™ Microstrip ring dipole and are interleaved to offer a narrow width for ease in zoning. Each band is independently capable of electrical downtilt. Specially designed so there is no distortion of azimuth coverage when set to its full tilt position. 2–3 dB gain has been added to the 1710–2170 MHz band to compensate for pass loss differences between the 1710–2170 MHz and 700 MHz bands.
 - World leader in the development of variable electrical downtilt for over 10 years with IP ownership of remote electrical downtilt technology that meets Antenna Interface Standards Group (AISG) requirements.



- CDMA
- Deltec Invents RET
- DualPol® Technology



2000 thru 2006

- Dual Band & Wideband
- Adaptive Arrays
- SDMA
- WiMAX



2008 +

- Agile Networks
- MIMO
- LTE
- SmartBeam®
- Concealment Solutions

65° Horizontal Beamwidth (HBW), Dual Polarization

Model	Type	Frequency (MHz)	Beam Tilt (degrees)	Gain (dBd/dBi)	HBW (degrees)	VBW (degrees)	USLS (dB)	F/B (dB)	Isolation (dB)	VSWR	Max. Input Power (W)	Weight (kg/lb)	Length (mm/in)	Width (mm/in)
LNX-6512DS-T0M	DualPol®	698-806	0	12.7 / 14.8	65	18.7	20	30	>30	<1.35	500	12.8 / 28.2	1232 / 48.5	301 / 11.9
		806-896	0	13.6 / 15.7	65	16.4	19	30	>30	<1.35	500			
LNX-6512DS-T2M	DualPol®	698-806	2	12.6 / 14.7	65	18.7	19	32	>30	<1.35	500	12.8 / 28.2	1232 / 48.5	301 / 11.9
		806-896	2	13.2 / 15.3	65	16.4	19	26	>30	<1.35	500			
LNX-6512DS-T4M	DualPol®	698-806	4	12.4 / 14.5	65	18.7	20	30	>30	<1.35	500	12.8 / 28.2	1232 / 48.5	301 / 11.9
		806-896	4	13.2 / 15.3	65	16.4	20	32	>30	<1.35	500			
LNX-6512DS-T6M	DualPol®	698-806	6	12.5 / 14.6	65	18.5	18	28	>30	<1.35	500	12.8 / 28.2	1232 / 48.5	301 / 11.9
		806-896	6	13.2 / 15.3	65	16.7	17	30	>30	<1.35	500			
LNX-6512DS-T8M	DualPol®	698-806	8	12.3 / 14.4	65	19.0	19	30	>30	<1.35	500	12.8 / 28.2	1232 / 48.5	301 / 11.9
		806-896	8	13.1 / 15.2	65	16.7	19	30	>30	<1.35	500			
LNX-6512DS-VTM	DualPol®	698-806	0-15	12.0 / 14.1	65	19.0	17	28	>30	<1.4:1	400	13.0 / 28.7	1232 / 48.5	301 / 11.9
		806-896	0-15	12.9 / 15.0	65	17.0	18	28	>30	<1.4:1	400			
LNX-6513DS-T4M	DualPol®	698-806	4	12.8 / 14.9	65	16.7	20	32	>30	<1.35	500	13.8 / 30.4	1390 / 54.7	301 / 11.9
		806-896	4	13.3 / 15.4	65	14.7	21	32	>30	<1.35	500			
LNX-6513DS-VTM	DualPol®	698-806	0-10	12.5 / 14.6	65	16.0	20	30	>30	<1.4:1	400	14.1 / 31.1	1390 / 54.7	301 / 11.9
		806-896	0-10	13.0 / 15.1	65	14.5	20	30	>30	<1.4:1	400			
LNX-6514DS-T4M	DualPol®	698-806	4	13.8 / 15.9	65	12.0	18	33	>30	<1.35	500	17.4 / 38.4	1847 / 72.7	301 / 11.9
		806-896	4	14.5 / 16.6	65	11.0	18	33	>30	<1.35	500			
LNX-6514DS-T6M	DualPol®	698-806	6	13.7 / 15.8	65	12.6	18	34	>30	<1.35	500	17.4 / 38.4	1847 / 72.7	301 / 11.9
		806-896	6	14.5 / 16.6	65	11.0	18	34	>30	<1.35	500			
LNX-6514DS-VTM	DualPol®	698-806	0-10	13.6 / 15.7	65	12.5	17	32	>30	<1.4:1	400	17.6 / 38.8	1847 / 72.7	301 / 11.9
		806-896	0-10	14.2 / 16.3	65	11.2	18	30	>30	<1.4:1	400			
LNX-6515DS-T4M	DualPol®	698-806	4	14.9 / 17.0	65	9.5	18	32	>30	<1.35	500	22.0 / 48.5	2449 / 96.4	301 / 11.9
		806-896	4	15.4 / 17.5	65	9.0	18	32	>30	<1.35	500			
LNX-6515DS-VTM	DualPol®	698-806	0-8	14.6 / 16.7	65	9.6	17	32	>30	<1.4:1	400	22.6 / 49.8	2449 / 96.4	301 / 11.9
		806-896	0-8	15.5 / 17.6	65	8.6	17	27	>30	<1.4:1	400			
LNXCP-6514DS-T6M	DualPol®	698-806	6	13.9 / 16.0	65	12.0	19	32	>30	<1.5:1	250	18.4 / 40.6	1847 / 72.7	301 / 11.9
		806-896	6	14.2 / 16.3	65	10.8	17	30	>30	<1.5:1	250			
DBXNH-6565A-VTM	DualPol® dual band	698-896	0-15	12.5 / 14.6	65	17.0	16	27	>30	<1.5:1	400	15.5 / 34.2	1293 / 50.9	301 / 11.9
		1710-2180	0-8	15.5 / 17.6	65	7.0	16	32	>30	<1.5:1	300			
DBXNH-6565B-VTM	DualPol® dual band	698-896	0-10	13.9 / 16.0	65	10.8	15	25	>30	<1.5:1	400	21.0 / 46.3	1847 / 72.7	301 / 11.9
		1710-2180	0-6	17.1 / 19.2	64	5.5	15	34	>30	<1.5:1	300			
SBNH-1D6565B	DualPol® dual band	698-896	0-10	13.1 / 15.2	67	10.8	15	27	>30	<1.5:1	400	21.5 / 47.4	1847 / 72.7	301 / 11.9
		1710-2180	0-6	16.3 / 18.4	65	5.5	15	35	>30	<1.5:1	300			
SBNH-1D6565C	DualPol® dual band	698-896	0-11	14.3 / 16.4	67	7.8	15	28	>30	<1.5:1	400	27.6 / 60.8	2449 / 96.4	301 / 11.9
		1710-2180	0-7	15.9 / 18.0	59	5.1	16	34	>30	<1.5:1	300			

85° Horizontal Beamwidth (HBW), Dual Polarization

Model	Type	Frequency (MHz)	Tilt (degrees)	Gain (dBd/dBi)	HBW (degrees)	VBW (degrees)	USLS (dB)	F/B (dB)	Isolation (dB)	VSWR	Max. Input Power (W)	Weight (kg/lb)	Length (mm/in)	Width (mm/in)
LNX-8511DS-T4M	DualPol®	698-806	4	11.8 / 13.9	85	18.4	22	28	>30	<1.35	500	13.0 / 28.7	1232 / 48.5	301 / 11.9
		806-896	4	12.2 / 14.3	85	16.5	20	30	>30	<1.35	500			
LNX-8514DS-T4M	DualPol®	698-806	4	13.9 / 16.0	85	9.5	18	28	>30	<1.35	500	22.9 / 50.5	2448 / 96.4	301 / 11.9
		806-896	4	14.4 / 16.5	85	8.0	16	30	>30	<1.35	500			
DBXNH-8585A-VTM	DualPol® dual band	698-896	0-15	11.0 / 13.1	88	16.5	16	25	>30	<1.5:1	500	14.5 / 32.0	1298 / 51.1	301 / 11.9
		1710-2180	0-10	13.9 / 16.0	85	6.5	15	26	>30	<1.5:1	300			
DBXNH-8585B-VTM	DualPol® dual band	698-896	0-10	12.3 / 14.4	87	11.0	15	26	>30	<1.4:1	400	21.0 / 46.2	1849 / 72.8	301 / 11.9
		1710-2180	0-6	15.6 / 17.7	85	4.7	18	29	>30	<1.5:1	300			
DBXNH-8585C-VTM	DualPol® dual band	698-896	0-9	13.4 / 15.5	85	8.2	16	22	>30	<1.5:1	400	25.8 / 56.9	2449 / 96.4	301 / 11.9
		1710-2180	0-6	15.1 / 17.2	85	4.5	18	26	>30	<1.5:1	300			
SBNH-1D8585B	DualPol® dual band	698-896	0-10	12.3 / 14.4	89	10.8	15	25	>30	<1.5:1	400	20.4 / 45.0	1849 / 72.8	301 / 11.9
		1710-2180	0-8	17.3 / 19.4	85	4.4	18	28	>30	<1.5:1	300			
SBNH-1D8585C	DualPol® dual band	698-896	0-9	13.3 / 15.4	85	8.1	16	22	>30	<1.5:1	400	26.0 / 57.3	2449 / 96.4	301 / 11.9
		1710-2180	0-6	15.2 / 17.5	85	4.5	19	27	>30	<1.5:1	300			

360° Horizontal Beamwidth (HBW), Vertical Polarization

Model	Type	Frequency (MHz)	Tilt (degrees)	Gain (dBd/dBi)	HBW (degrees)	VBW (degrees)	USLS (dB)	F/B (dB)	Isolation (dB)	VSWR	Max. Input Power (W)	Weight (kg/lb)	Length (mm/in)	Radome OD (mm/in)
DB583E-SN	Omni	698-770	0	3.0 / 5.1	360	30	-	-	-	<1.5:1	300	3.0 / 6.6	953 / 37.5	38.1 / 1.5
DB806-A	Omni	740-806	0	6.0 / 8.1	360	16.0	-	-	-	<1.5:1	400	7.3 / 16.0	1575 / 62.0	50.8 / 2.0
DB810E-PS	Omni	746-869	0	10.0 / 12.1	360	6.0	-	-	-	<1.5:1	500	17.0 / 37.5	4483 / 176.5	76.0 / 3.0
DB810KE-A	Omni	746-776	0	10.0 / 12.1	360	6.0	-	-	-	<1.5:1	500	18.1 / 40.0	4846 / 190.8	76.2 / 3.0

Andrew Solutions Tower Mounted Amplifier

Tower Mounted Amplifier products are now available in our industry-leading 4th generation OneBase® platform, which includes the following features and benefits:

- Smaller, lighter form factor reduces tower loading and leasing costs.
- Cost-efficient twin and dual-band configurations reduce CAPEX.
- AISG capability enables integration and control of tower-top components.
- Intelligent dc power and AISG switching supports power/AISG redundancy and provides enhanced versatility and interoperability.
- 850 MHz and PCS pass-through feature provides additional co-siting flexibility.



E15Z01P07
OneBase®
Dual Duplex TMA

Expected Performance:

700 MHz and AWS TMA

Electrical		
<i>UPLINK</i>	700 MHz	AWS
Frequency range, MHz	698–716	1710–1755
Gain, dB	12 ± 1	12 ± 1
Total group delay, ns	200 max	50 max
Group delay variation, ns	100 max	15 max
Noise figure, dB	2.0 max	1.6 max
Return loss, dB	18 min	18 min
Output IP3, dBm	+20	+20

<i>DOWNLINK</i>	700 MHz	AWS
Frequency range, MHz	728–746	2110–2155
Insertion loss, dB	0.5 max	0.3 max
Total group delay, ns	55 max	15 max
Group delay variation, ns	40 max	10 max
Return loss, dB	18 min	18 min
Maximum input power – RMS, W	300	
Maximum input power – PEP, W	3000	
Passive IM products (2 x 43 dBm), dBc	153 typical	
Insertion loss 850 pass-through (869–894 MHz), dB	0.3 max	
Insertion loss PCS pass-through (1930–1990 MHz), dB	0.3 max	


<i>AISG</i>	
Protocol	AISG 1.1 and 2.0 multi-standard
RET antenna support	24 Vdc & RS-485

<i>POWER</i>	
Power supply voltage, Vdc	7-30

<i>Mechanical</i>	
Height, depth, width, mm (in)	250 x 290 x 80 (9.8 x 11.4 x 3.2)
Weight w/o mounting hardware, kg (lb)	7.0 (15.4)
Finish	Gray paint
Connectors, RF	7-16 DINf (long-neck)
Connector, AISG	8 pin circ, IEC60130
Ground screw diameter, in	1/4 in

<i>Environmental</i>	
Operating temperature range, °C	-40 to +65
Relative humidity, %	5–100
Ingress protection	IP67
Lightning protection ANT port	dc ground
Lightning protection BTS port	10 kA, 8/20 us


700 MHz / AWS Dual Band TMA

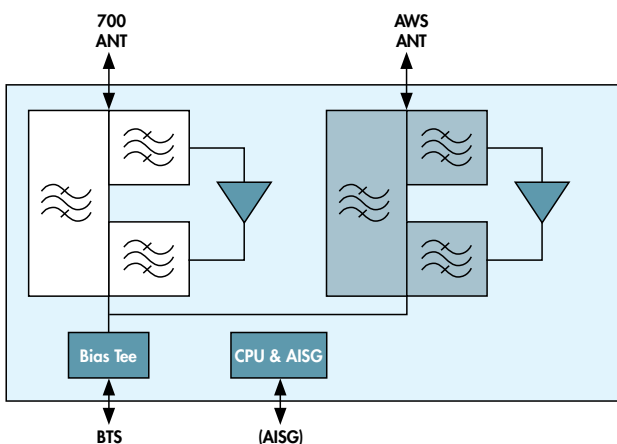

Andrew Solutions Crossband Coupler Products 700 MHz and Multi-Band

Andrew Solutions Crossband Coupler products are available in a wide variety of frequency band combinations, both as wideband diplexers, and in the form of diplexers and triplexers for specific bands. Our CBC product portfolio offers the following features and benefits:

- Compact form factors reduce tower loading and leasing costs.
- Stackable designs and available multi-unit mounting kits simplify installation.
- Optional internal or external dc blocking accommodates different site architectures.
- Compatibility with AISG signaling on the RF path.
- Superior power ratings support multi-carrier applications with all modulations.
- Rugged design using proven technology.
- Superior RF performance.
- Outstanding field record – hundreds of thousands of units deployed worldwide.
- Ideal choice for both suburban and rural areas.

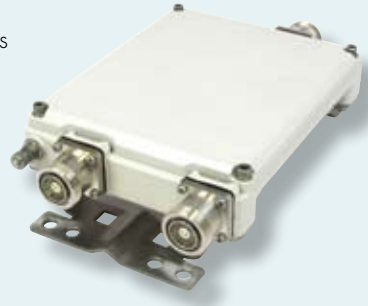

Crossband Coupler for 700/850 MHz and PCS/AWS			
Model: CBC721-DF			
Electrical	Low Frequency Path	High Frequency Path	
Frequency range, MHz	698–960	1710–2170	
Insertion loss, dB	0.15 max	0.20 max	
Isolation, dB	60 min	60 min	
Return loss, dB	22 min	20/22 min	
Mechanical			
Height, depth, width, mm (in)	196 x 153 x 39.5 (7.7 x 6.0 x 1.6)		
Weight w/o mounting hardware, kg (lb)	2.0 (4.4)		
Finish	Gray paint		
Connectors, RF	7–16 DIN-f (medium-neck)		
Ground screw diameter, in	1/4		
Crossband Coupler for 700 MHz and 850 MHz			
Model: CBC78-DF			
Electrical	Low Frequency Path	High Frequency Path	
Frequency range, MHz	698–787	824–894	
Insertion loss, dB	0.25 max	0.25 max	
Isolation, dB	50 min	50 min	
Return loss, dB	22 min	22 min	
Mechanical			
Height, depth, width, mm (in)	200 x 150 x 66.5 (7.9 x 5.9 x 2.6)		
Weight w/o mounting hardware, kg (lb)	3.0 (6.6)		
Finish	Gray paint		
Connectors, RF	7–16 DIN-f (long-neck)		
Ground screw diameter, in	1/4		
Triplexer for 700 MHz and 850 MHz and PCS/AWS			
Model: CBC7821-DF			
Electrical	Low Frequency Path	MID Frequency Path	High Frequency Path
Frequency range, MHz	698–787	824–894	1710–2170
Insertion loss, dB	0.20 max	0.20 max	0.15 max
Isolation at high frequency band, dB	50 min	50 min	50 min
Return loss, dB	22 min	22 min	22 min
Mechanical			
Height, depth, width, mm (in)	200 x 175 x 70 (7.9 x 6.9 x 2.8)		
Weight w/o mounting hardware, kg (lb)	3.5 (7.7)		
Finish	Gray paint		
Connectors, RF	7–16 DIN-f (medium-neck)		
Ground screw diameter, in	1/4		
General Environmental for CBC721-DF and CBC78-DF Crossband Couplers and CBC7821-DF Triplexer			
Operating temperature range, °C	–40 to +65		
Relative humidity, %	5–100		
Ingress protection	IP67		
Lightning protection ANT port	dc ground		
Lightning protection BTS port	10 kA, 8/20 µs		



www.commscope.com

Visit our Web site or contact your local Commscope representative for more information.

© 2011 Commscope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of Commscope, Inc.

This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to Commscope products or services.

BR-103009.2-EN (06/11)